


8249PL-16BK-US / 8249PL-16GD-US

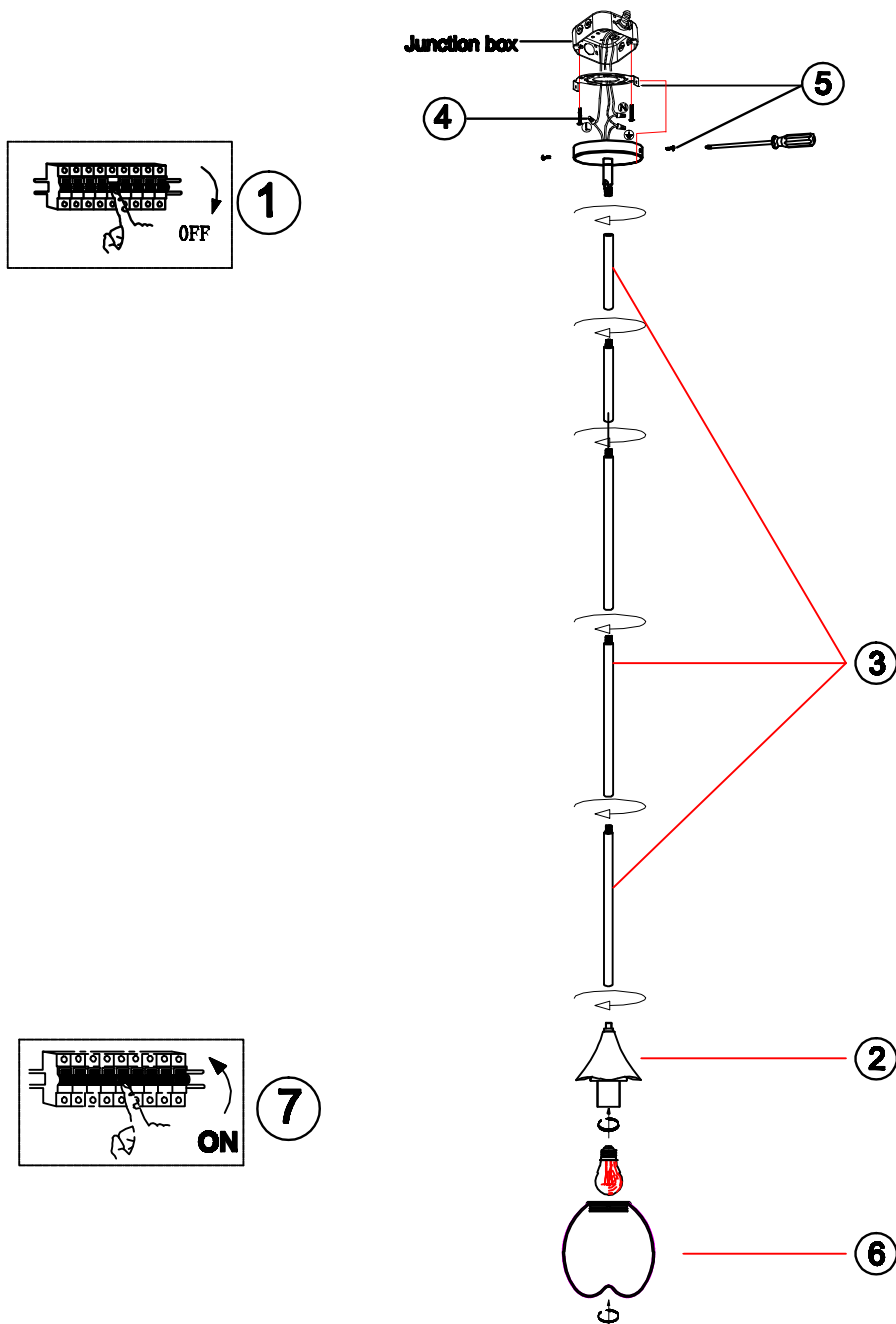

- 1 : Shut down the power.
- 2 : Take the lamp cap out of the package and stretch the wires.
- 3 : Take the double internal tube light from the packaging. Pass the lamp head wire through the tube, the straight pipe, and the ceiling plate one by one, and then tighten it.
- 4 : Screw on the terminal cap in the correct way.
- 5 : Screw the mounting plate to the junction box. Then fix the screws on both sides of the canopy.
- 6 : Turn the E26 bulb into the lamp socket.
- 7 : Turn the glass cover onto the ring on the top of the lamp base, and make sure the teeth align properly.
- 8 : Turn on the main power supply, and the lights will come on.